

# SILVERTHIN SM34020XP0 340 mm Open Type X Thin Section Bearing

## Specifications

|                                 |                           |
|---------------------------------|---------------------------|
| Bore (B)                        | 340.000 mm                |
| Outside Diameter (D)            | 380.000 mm                |
| Width                           | 20mm                      |
| Land Diameter (L <sub>1</sub> ) | 355.000 mm                |
| Land Diameter (L <sub>2</sub> ) | 365.000 mm                |
| Approximate Weight              | 2.54 kg                   |
| Separator                       | Brass; snapover separator |
| Precision Class                 | ABEC Class 1              |
| Bearing Type                    | 4-Point Contact (Type X)  |
| Seals, Shields                  | None (Open)               |
| Unit System                     | Metric                    |

## Load Capacities


|                     |            |
|---------------------|------------|
| Static Radial Load  | 79,865 n   |
| Dynamic Radial Load | 43,035 n   |
| Static Thrust Load  | 199,670 n  |
| Dynamic Thrust Load | 70,145 n   |
| Static Moment Load  | 14,375 N-m |
| Dynamic Moment Load | 5,810 N-m  |

## Interchange

Silverthin [SM34020XP0](#) Kaydon [K34020XP0](#) Kaydon [K34020XP0](#)

## Brass; snapover separator

3/8" balls

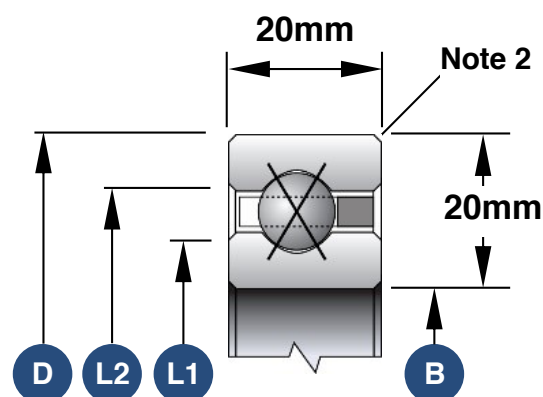

1. Load capacities are not additive
2. The maximum shaft or housing fillet radius that the bearing corners will clear for this series is 1.5mm
3. Race Width Tolerance: +0.000 -0.127mm

## Also Available

|                              |                            |
|------------------------------|----------------------------|
| Open Angular Contact         | <a href="#">SM34020AR0</a> |
| Open Radial Contact          | <a href="#">SM34020CP0</a> |
| Open Duplexed (Back-to-Back) | <a href="#">SM34020BR0</a> |
| Open Duplexed (Face-to-Face) | <a href="#">SM34020FR0</a> |

866.294.5841

425.222.7535

sales@silverthin.com

8152 - 304th Ave. S.E. PO Box 5012 Preston, WA 98050-5012 USA

Copyright © 2024 All rights reserved by Silverthin